


**RLP 36C25022R0218- Exhibit D - CONCEPTUAL SPACE PLAN & FINISHES  
VA DIAGNOSTIC IMAGING AND CANCER CENTER**

Department	Functional Area	ROOM	Room Code	Qty	ABOA SF
IMAGING	SHARED	Nurse Station	NSTA2	1	200
IMAGING	SHARED	Medicaiton Room	CLHMD	1	120
IMAGING	SHARED	Housekeeping Aides Closet	JANC2	1	60
IMAGING	SHARED	Alcove, Linen Cart	CHC01	1	20
IMAGING	SHARED	Alcove, Linen Cart	CHC01	1	20
IMAGING	SHARED	Alcove, Wheelchair	CSWH1	1	30
IMAGING	SHARED	Utility Room, Clean	CSUC3	1	120
IMAGING	SHARED	Utility Room, Soiled	CSUS3	1	150
IMAGING	SHARED	Equipment Storang	CLHS4	1	150
IMAGING	SHARED	Equipment Storang	CLHS4	1	150
IMAGING	SHARED	Storage Room, Sterile	SRS04	1	120
IMAGING	SHARED	Storage Room, Sterile	SRS04	1	120
IMAGING	SHARED	Cubicle, Provider Changing	LR003	1	60
IMAGING	SHARED	Cubicle, Provider Changing	LR003	1	60
IMAGING	SHARED	Cubicle, Provider Changing	LR003	1	60
IMAGING	SHARED	Reception	RCP01	1	120
IMAGING	SHARED	Cubicle, Administrative	OFA03	1	80
IMAGING	SHARED	ADMINISTRATIVE, SHARED, 2-PERSON	OFA05	1	180
IMAGING	SHARED	Alcove, Medical Equipment	CSME1	1	20
IMAGING	MRI	NURSE STATION, SUBSTATION	NSTA3	1	100
IMAGING	MRI	TOILET	TLTU1	1	60
IMAGING	MRI	Waiting, MR	WTMRI	1	40
IMAGING	MRI	Consult Room	CONS1	1	120
IMAGING	MRI	Scanning Room	XMRS1	1	650
IMAGING	MRI	Control Room	XACR1	1	200
IMAGING	MRI	MRI System Component Room	XACV1	1	180
IMAGING	CT	NURSE STATION, SUBSTATION	NSTA3	1	100
IMAGING	CT	TOILET	TLTU1	1	60
IMAGING	CT	SUB-WAITING	WRC03	1	40
IMAGING	CT	INTRAVENOUS INFUSION, THERAPY	OPCT1	1	200
IMAGING	CT	Scanning Room, CT	XCTS1	1	650
IMAGING	CT	Control Room	XACR1	1	200
IMAGING	CT	System Component Room	XACV1	1	150

IMAGING	NUCLEAR MED	NURSE STATION, SUBSTATION	NSTA3	1	100
IMAGING	NUCLEAR MED	TOILET	TLTU1	1	60
IMAGING	NUCLEAR MED	SUB-WAITING	WRC03	1	75
IMAGING	NUCLEAR MED	Consult Room	CONS1	1	120
IMAGING	NUCLEAR MED	INTRAVENOUS INFUSION, THERAPY	OPCT1	1	150
IMAGING	NUCLEAR MED	Scanning Room	XCTS1	1	650
IMAGING	NUCLEAR MED	XRAY, SPECT / PET / CT CONTROL	XPCC1	1	200
IMAGING	NUCLEAR MED	ECHOCARDIOGRAPH, STRESS	OPPE2	1	350
IMAGING	NUCLEAR MED	NUCLEAR MEDICINE, DECAY STORAGE	NMDS1	1	100
IMAGING	NUCLEAR MED	Nourishment Room	NCWD1	1	
IMAGING	NUCLEAR MED	PET: Scanning Room, PET/CT	NMSS1	1	650
IMAGING	NUCLEAR MED	XRAY, SPECT / PET / CT CONTROL	XPCC1	1	180
IMAGING	NUCLEAR MED	XRAY, SPECT / PET / CT COMPONENT	XPCC2	1	120
IMAGING	NUCLEAR MED	Thyroid Uptake Room	NMUR1	1	120
IMAGING	NUCLEAR MED	Thyroid Uptake Room	NMUR1	1	120
IMAGING	NUCLEAR MED	Thyroid Uptake Room	NMUR1	1	120
IMAGING	NUCLEAR MED	NUCLEAR MEDICINE, RADIOPHARMACY	NMRP1	1	220
IMAGING	NUCLEAR MED	Utility Room, Soiled	CSUS3	1	120
IMAGING	ULTRASOUND	NURSE STATION, SUBSTATION	NSTA3	1	100
IMAGING	ULTRASOUND	SUB-WAITING	WRC03	1	40
IMAGING	ULTRASOUND	Cubicle, Provider Changing	LR003	1	60
IMAGING	ULTRASOUND	Consult Room	CONS1	1	120
IMAGING	ULTRASOUND	TOILET	TLTU1	1	60
IMAGING	ULTRASOUND	Xray, Ultrasound	XDUS1	1	400
CANCER CARE	CAREINFUSION	Reception	RCP01	1	120
CANCER CARE	CAREINFUSION	Utility Room, Clean	CSUC3	1	120
CANCER CARE	CAREINFUSION	Utility Room, Soiled	CSUS3	1	100
CANCER CARE	CAREINFUSION	Alvoce, Linen Cart	CHC01	1	20
CANCER CARE	CAREINFUSION	Alcove, Wheelchair	CSWH1	1	30
CANCER CARE	CAREINFUSION	TOILET	TLTU1	1	60
CANCER CARE	CAREINFUSION	INTRAVENOUS INFUSION, THERAPY	OPCT1	1	80
CANCER CARE	CAREINFUSION	INTRAVENOUS INFUSION, THERAPY	OPCT1	1	80
CANCER CARE	CAREINFUSION	INTRAVENOUS INFUSION, THERAPY	OPCT1	1	80
CANCER CARE	CAREINFUSION	INTRAVENOUS INFUSION, THERAPY	OPCT1	1	80
CANCER CARE	CAREINFUSION	INTRAVENOUS INFUSION, THERAPY	OPCT1	1	80

CANCER CARE	CAREINFUSION	INTRAVENOUS INFUSION, THERAPY	OPCT1	1	80
CANCER CARE	CAREINFUSION	INTRAVENOUS INFUSION, THERAPY	OPCT1	1	80
CANCER CARE	CAREINFUSION	INTRAVENOUS INFUSION, THERAPY	OPCT1	1	80
CANCER CARE	CAREINFUSION	INTRAVENOUS INFUSION, THERAPY	OPCT1	1	80
CANCER CARE	CAREINFUSION	INTRAVENOUS INFUSION, THERAPY	OPCT1	1	80
CANCER CARE	CAREINFUSION	INTRAVENOUS INFUSION, THERAPY	OPCT1	1	80
CANCER CARE	CAREINFUSION	TOILET	TLTU1	1	
CANCER CARE	CAREINFUSION	TOILET	TLTU1	1	
CANCER CARE	CAREINFUSION	Nurse Station	NSTA1	1	180
CANCER CARE	CAREINFUSION	Waiting, General, 20 People	WTG20	1	450
CANCER CARE	CAREINFUSION	PHARMACY, OFF SITE SATELLITE, MEDIUM VOLUME	PHDS1	1	650
CANCER CARE	CAREINFUSION	Office, Administrative Shared	OFA02	1	220
CANCER CARE	CAREINFUSION	Medication Preparation Room	CSMP2	1	150
CANCER CARE	CAREINFUSION	Procedure Room	PROC1	1	200
CANCER CARE	CAREINFUSION	Procedure Room	PROC1	1	200
CANCER CARE	CAREINFUSION	Procedure Room	PROC1	1	200
CANCER CARE	CAREINFUSION	Storage, Hazardous Drug	PHHD2	1	250
CANCER CARE	CAREINFUSION	Storage, Sterile Compounding	PHSC2	1	250
CANCER CARE	CAREINFUSION	INTRAVENOUS INFUSION, THERAPY	OPCT1	1	150
GENERAL BUILDING PUBLIC-PATIENT	PUBLIC-PATIENT	Waiting, General, 16 People	WTG16	1	450
GENERAL BUILDING PUBLIC-PATIENT	PUBLIC-PATIENT	Toilet, Public, Female	TLTF2	1	120
GENERAL BUILDING PUBLIC-PATIENT	PUBLIC-PATIENT	Toilet, Public, Male	TLTM2	1	120
GENERAL BUILDING PUBLIC-PATIENT	PUBLIC-PATIENT	Alcove, Wheelchair	CSWH1	1	40
GENERAL BUILDING STAFF SUPPORT	GENERAL BUILDING STAFF SUPPORT	Security Station	RCSS1	1	45
GENERAL BUILDING STAFF SUPPORT	GENERAL BUILDING STAFF SUPPORT	Reception/ Check-In	RCED2	1	250

GENERAL BUILDING STAFF SUPPORT	GENERAL BUILDING STAFF SUPPORT	Material Handling Terminal, Clean	MMRP2	1	200
GENERAL BUILDING STAFF SUPPORT	GENERAL BUILDING STAFF SUPPORT	Staff Lounge	SSLG3	1	420
GENERAL BUILDING STAFF SUPPORT	GENERAL BUILDING STAFF SUPPORT	TOILET	TLTU1	1	60
GENERAL BUILDING STAFF SUPPORT	GENERAL BUILDING STAFF SUPPORT	TOILET	TLTU1	1	60
GENERAL BUILDING STAFF SUPPORT	GENERAL BUILDING STAFF SUPPORT	LABORATORY, HEMOTOLOGY, LARGE	LMHI4	1	480
GENERAL BUILDING STAFF SUPPORT	GENERAL BUILDING STAFF SUPPORT	Telecommunications Room (TR)	TETR1	1	100
GENERAL BUILDING STAFF SUPPORT	GENERAL BUILDING STAFF SUPPORT	HVAC and Electrical Equipment, Computer Area	ITAC1	1	100
Cirrculation / Fit Factor 20%				ALL Space	4000
<b>Totals:</b>	X	X	X	<b>100</b>	<b>19500</b>

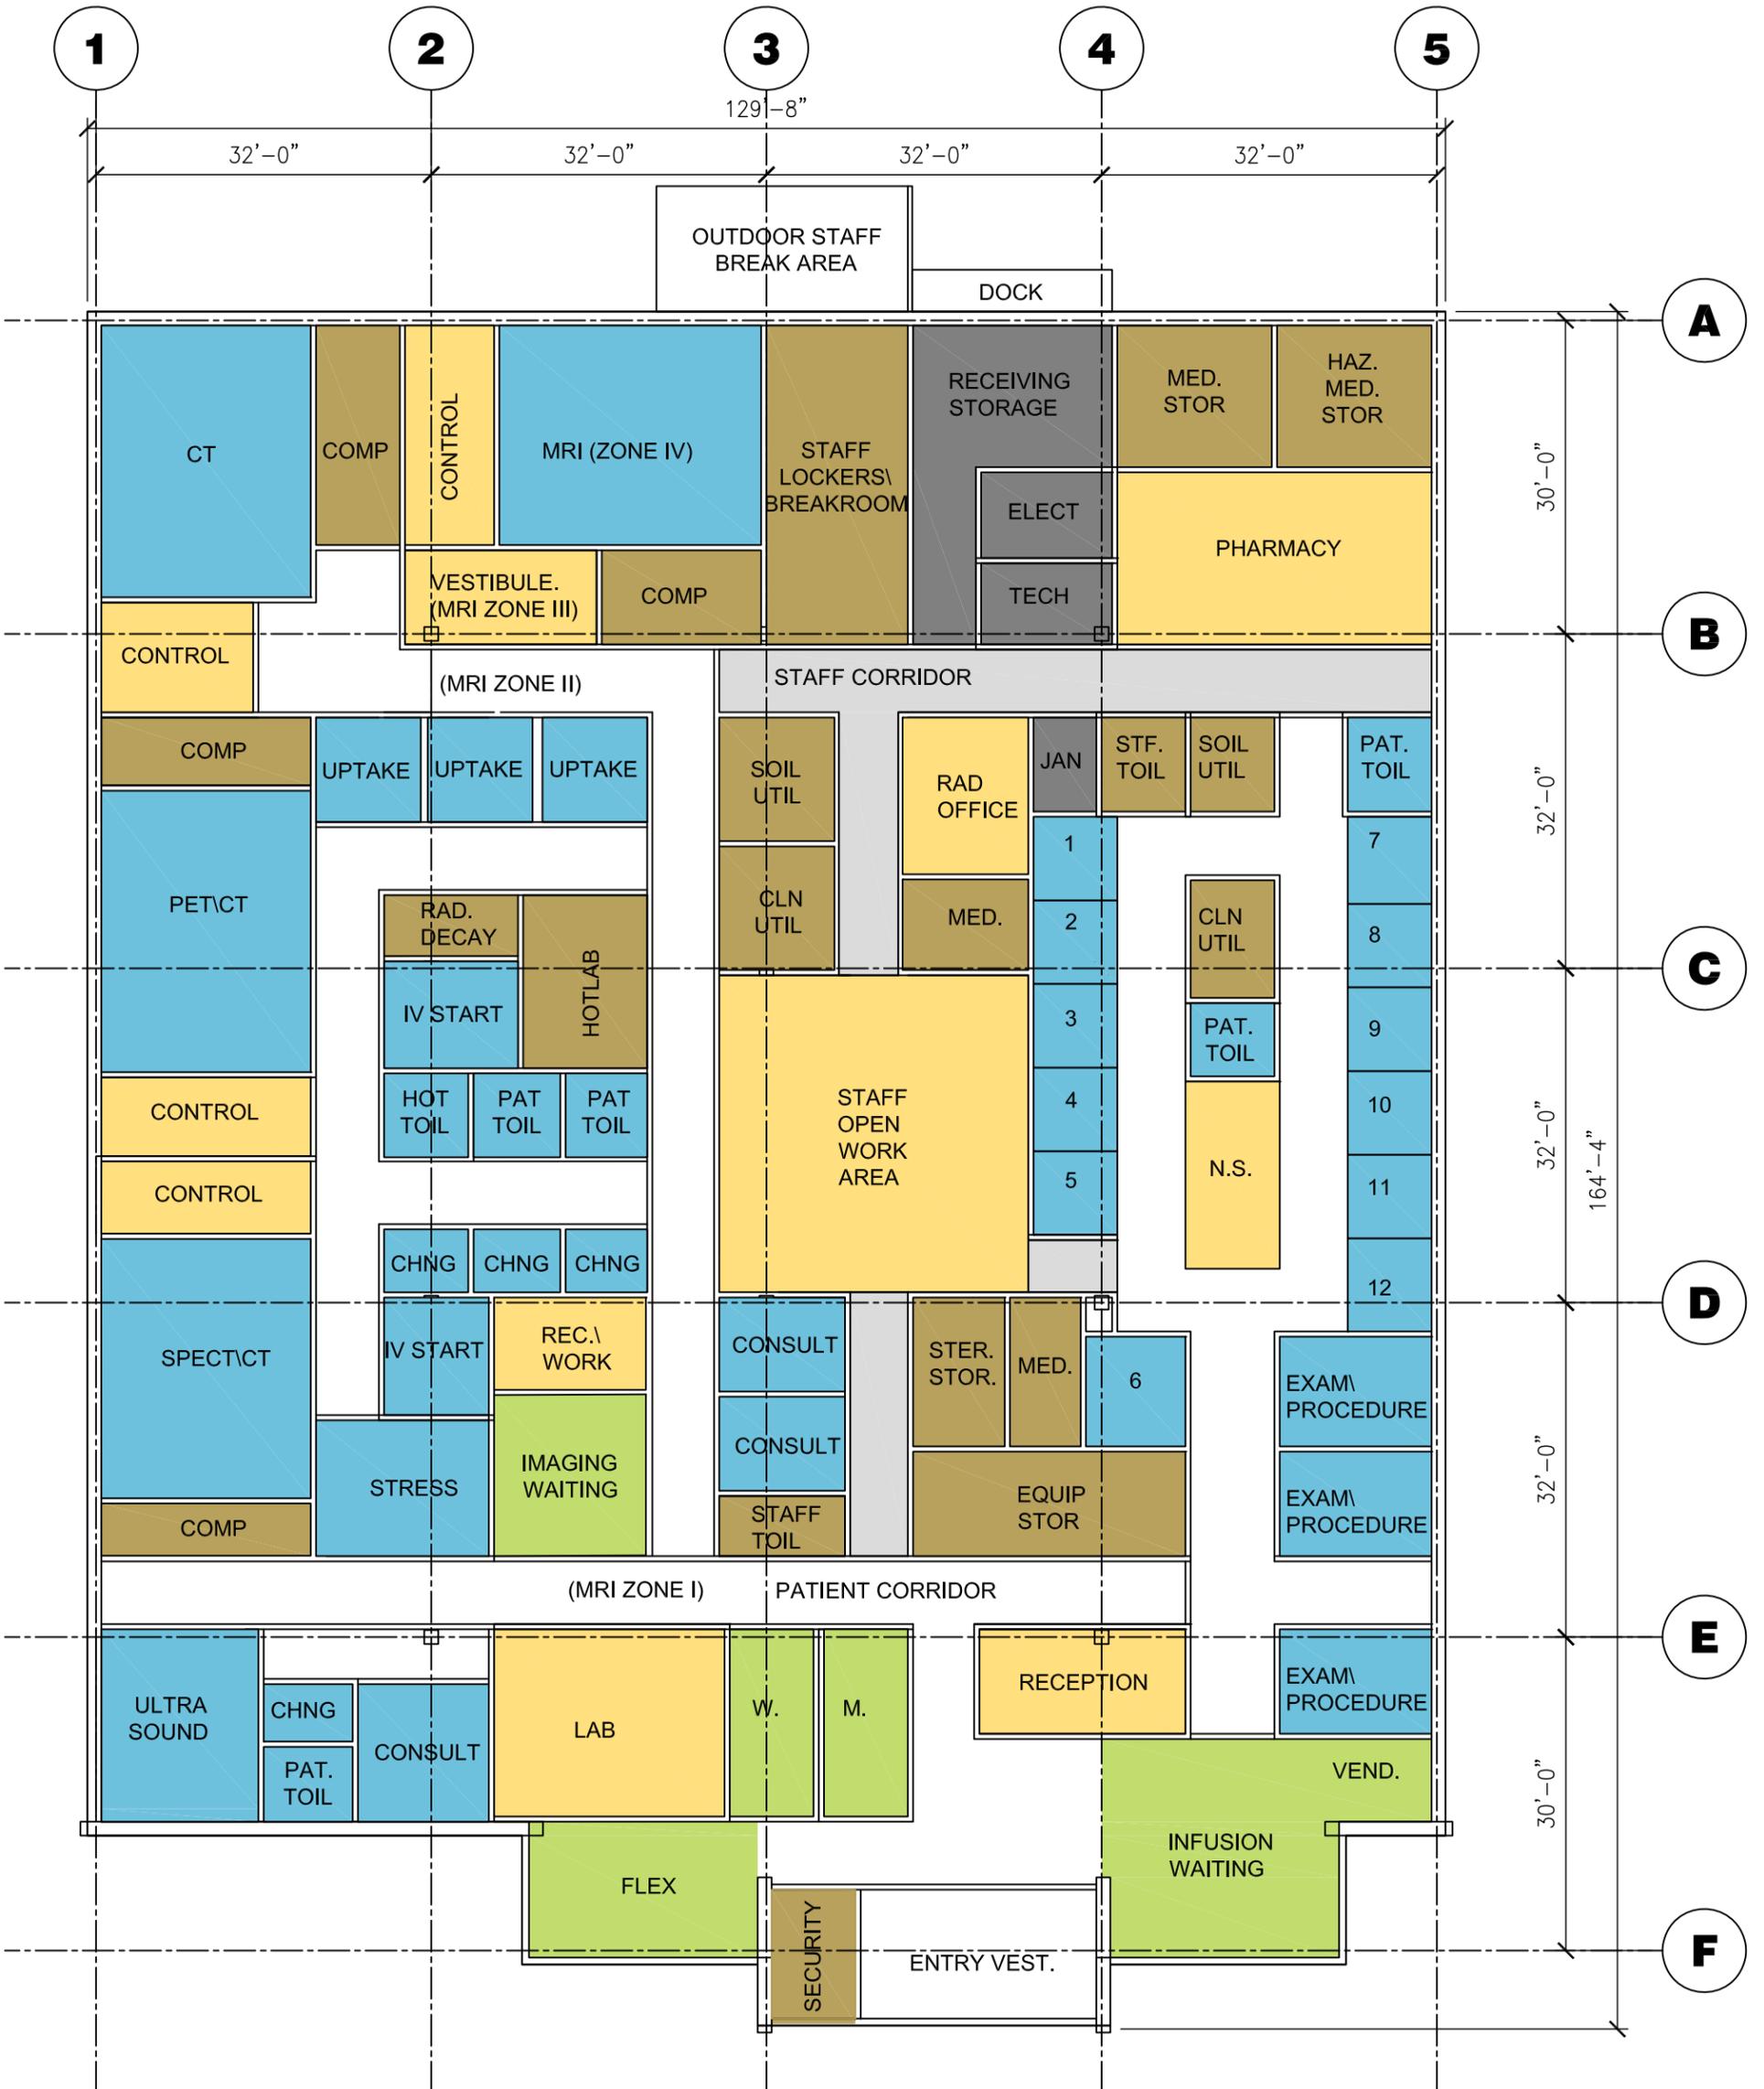

**LEGEND - FUNCTION**

- TEAM WORK AREA
- STAFF\SUPPORT
- PATIENT\PUBLIC SUPPORT
- PATIENT TREATMENT\SUPPORT
- PATIENT CIRCULATION
- STAFF CIRCULATION
- BUILDING SUPPORT

**VA DIAGNOSTIC IMAGING AND CANCER CARE**

SCALE 1/16" = 1'-0"

01/04/2022

## VA DIAGNOSTIC IMAGING AND CANCER CENTER(541-381)

## FINISH SCHEDULE

Room Number	Room Name	FLOOR	WALLS	BASE	CEILING	MILLWORK	NOTES
	Entry Vestibule	RT-1	PT-1	RB-1	ACT-2		
	Security	CAR-1	PT-1	RB-1	ACT-1		
	Public Toilet (Male)	CT-1	CT-1\CT-2	CT	GWB\PT	SSM-1	CT-1 48" HIGH WAINSCOT W\ CT-2 ACCENT; WET WALL FULL HGT
	Public Toilet (Female)	CT-1	CT-1\CT-2	CT	GWB\PT	SSM-1	CT-1 48" HIGH WAINSCOT W\ CT-2 ACCENT; WET WALL FULL HGT
	Lab	SV-1	PT-2	RB-1	ACT-3	SSM-2\PL-1	
	Changing (Ultrasound)	LVT-1	PT-1	RB-1	ACT-1		
	Consult (Ultrasound)	LVT-1	PT-1	RB-1	ACT-1		
	Untrasound Scan	LVT-1	PT-1	RB-1	ACT-1	SSM-2\PL-1	
	Ultrasound Patient Toilet	CT-1	PT-1	CT	GWB\PT		
	Patient Corridor	CT-1	WC-3\PT-1	RB-1	ACT-1		
	Staff Work Corridor	LVT-1	PT-1	RB-1	ACT-1		
	Reception	CAR-1	PT-1	RB-1	ACT-1		
	Infusion Waiting	LVT-1	WC-1\PT-1	RB-1	ACT-2		
	Infusion Entry Corridor	SV-1	WC-1\PT-1	RB-1	ACT-1		
	Exam \Procedure	SV-1	PT-1	SV-1	ACT-3	SSM-2\PL-1	INTEGRAL BASE
	Exam \Procedure	SV-1	PT-1	SV-1	ACT-3	SSM-2\PL-1	INTEGRAL BASE
	Exam \ Procedure	SV-1	PT-1	SV-1	ACT-3	SSM-2\PL-1	INTEGRAL BASE
	Treatment Room (Infusion)	SV-1	PT-1	RB-1	ACT-1		
	Infusion Corridor	SV-1	WC-2\PT-1	RB-1	ACT-1		
	Meds	SV-1	PT-1	RB-1	ACT-1	SSM-2\PL-1	
	Treatment Cubicles	SV-1	PT-1	RB-1	ACT-1		
	Patient Toilet (Infusion)	CT-1	PT-1	RB-1	GWB		
	Clean Utility (Infusion)	SV-1	WC-4	RB-1	ACT-1	SSM-2\PL-1	
	Soiled Utility (Infusion)	SV-1	WC-4	RB-1	ACT-1	SSM-2\PL-1	
	Patient Toilet (Infusion)	CT-1	PT-1	CT	GWB\PT		
	Staff Corridor	LVT-1	WC-2\PT-1	RB-1	ACT-1		
	Staff Toilet	CT-1	PT-1	RB-1	GWB		
	Pharmacy	SV-1	PT-2	RB-1	ACT-3	SSM-2\PL-1	
	Med Storage	SV-1	PT-1	RB-1	ACT-1	SSM-2\PL-1	
	Haz Med Storage	SV-1	PT-1	RB-1	ACT-1	SSM-2\PL-1	
	Janitor	SV-1	WC-4	RB-1	ACT-1		
	Receiving Corridor	CONC	PT-1	RB-1	EXP		
	Tech Room	CONC	PT-1	RB-1	EXP		
	Elect Room	CONC	PT-1	RB-1	EXP		
	Receiving \ Storage	CONC	PT-1	RB-1	EXP		
	Staff Lockers\Breakroom	CAR-1	PT-1	RB-1	ACT-1		
	Radiology Office	CAR-1	PT-1	RB-1	ACT-1		
	Soiled Utility	SV-1	WC-4	RB-1	ACT-1	SSM-2\PL-1	
	Clean Utility	SV-1	WC-4	RB-1	ACT-1	SSM-2\PL-1	
	Meds	SV-1	WC-4	RB-1	ACT-1	SSM-2\PL-1	
	Sterile Storage	SV-1	WC-4	RB-1	ACT-1		
	Equipment Storage	SV-1	WC-4	RB-1	ACT-1		
	Staff Toilet	CT-1	PT-1	RB-1	GWB		
	CT Corridor	CT-1	WC-3\PT-1	RB-1	ACT-1		
	Hot Lab	SV-1	WC-4	RB-1	ACT-1		
	Rad Decay	LVT-1	PT-1	RB-1	ACT-1		
	Control (PET\CT)	RT-2	PT-1	RB-1	ACT-1		
	Control (SPECT\CT)	RT-2	PT-1	RB-1	ACT-1		
	Nuc Med Patient Corridor	CT-1	WC-3\PT-1	RB-1	ACT-1		
	SPECT\CT Scan	RT-2	PT-1	RB-1	ACT-1		
	Component (SPECT\CT)	LVT-1	PT-1	RB-1	ACT-1		
	Stress Test	LVT-1	PT-1	RB-1	ACT-1		
	IV Start	SV-1	PT-1	RB-1	ACT-1		
	Patient Toilet (Imaging)	CT-1	PT-1	RB-1	GWB		
	Hot Toilet	CT-1	PT-1	RB-1	GWB		
	Uptake	SV-1	PT-1	RB-1	ACT-1		
	Uptake	SV-1	PT-1	RB-1	ACT-1		
	Uptake	SV-1	PT-1	RB-1	ACT-1		
	PET\CT Scan	RT-2	PT-1	RB-1	ACT-1	SSM-2\PL-1	
	Component (PET\CT)	LVT-1	PT-1	RB-1	ACT-1		
	Imaging Corridor	CT-1	WC-3\PT-1	RB-1	ACT-1		
	Component (MRI)	LVT-1	PT-1	RB-1	ACT-1		
	Vestibule (MRI)	RT-2	PT-1	RB-1	ACT-1		
	Control (MRI)	RT-2	PT-1	RB-1	ACT-1		
	MRI Scan	RT-2	PT-1	RB-1	ACT-1	SSM-2\PL-1	
	Component (CT)	LVT-1	PT-1	RB-1	ACT-1		
	CT Scan	RT-2	PT-1	RB-1	ACT-1	SSM-2\PL-1	
	Control (CT)	RT-2	PT-1	RB-1	ACT-1		
	IV Start	SV-1	PT-1	RB-1	ACT-1		
	Patient Toilet	CT-1	PT-1	RB-1	GWB		

Changing	LVT-1	PT-1	RB-1	ACT-1		
Changing	LVT-1	PT-1	RB-1	ACT-1		
Changing	LVT-1	PT-1	RB-1	ACT-1		
Consultant (Imaging)	CAR-1	PT-1	RB-1	ACT-1		
Consultant (Imaging)	CAR-1	PT-1	RB-1	ACT-1		
Reception (Imaging)	LVT-1	WC-1\PT-1	RB-1	ACT-2		
Imaging Waiting	LVT-1	WC-1\PT-1	RB-1	ACT-2		

- ACT-1 | 2X2 ARMSTRONG OPTIMA
- ACT-2 | ARMSTRONG METAL WORKS
- ACT-3 | MILAR; CLEANABLE
- CAR-1 | CARPET
- CT-1 | 12X24 CERAMIC TILE - AMERICAN OLEAN OR FLORIDA TILE
- CT-2 | MOSAIC ACCENT
- LVT-1 | WINEO PURLINE
- PL-1 | PLASTIC LAMINATE
- PT-1 | SHERWIN WILLIAMS HARMONY
- PT-2 | SPECIAL COATING
- SV-1 | WINEO PURLINE
- SSM-1 | CAMBRIA QUARTZ
- SSM-2 | CORION
- RB-1 | JOHNSONITE 4"
- RT-1 | ESD NORA
- RT-2 | SHAW PHILADELPHIA OR MANNINGTON CHARGE
- WC-1 | MCD TYPE II
- WC-2 | P3TEC TYPE III
- WC-3 | FORMICA HARD STOP
- WC-4 | CS ACROVYN
  
- GWB | GYPSUM WALL BOARD
- CONC | SEALED CONCRETE
- EXP | EXPOSED

## VA DIAGNOSTIC IMAGING AND CANCER CENTER (541-381)

## DOOR SCHEDULE

Room Number	Room Name	Opening Width	Opening Height	Door Material	Frame Material	Glazing	Notes
1A	Entry Vestibule (Exterior)	6'-0"	7'-0"	Glass	Alum.	Insul. Temp.	Powered, pair sliding, photo cell, EAC
1B	Entry Vestibule (Interior)	6'-0"	7'-0"	Glass	Alum.	Temp.	Powered, pair sliding, photo cell,
2	Security	3'-0"	7'-0"	Wood	HM		Office set
3	Public Toilet (Male)	3'-0"	7'-0"	Wood	HM		Push\Pull, Closer
4	Public Toilet (Female)	3'-0"	7'-0"	Wood	HM		Push\Pull, Closer
5	Lab	3'-0"	7'-0"	Wood	HM		EAC, Closer
6	Changing (Ultrasound)	3'-6"	7'-0"	Wood	HM		Privacy set
7	Consult (Ultrasound)	3'-6"	7'-0"	Wood	HM		Classroom set
8A	Ultrasound Scan	3'-6"	7'-0"	Wood	HM		Classroom set
8B	Ultrasound Patient Toilet	3'-6"	7'-0"	Wood	HM		Privacy set w\ indicator
9	Staff Work Area	3'-0"	7'-0"	Wood	HM		EAC
10	Reception	3'-0"	7'-0"	Wood	HM		EAC
11A	Infusion Entry (Patient Corridor)	3'-0"	7'-0"	Glass	Alum.	Temp.	EAC, sidelight
11B	Infusion Entry (Waiting)	6'-0"	7'-0"	Wood	HM		Powered, Equal pair swinging, EAC, control from reception,
12	Exam	3'-0"	7'-0"	Wood	HM		Classroom set
13	Exam	3'-0"	7'-0"	Wood	HM		Classroom set
14	Exam	3'-0"	7'-0"	Wood	HM		Classroom set
15	Treatment Room (Infusion)	3'-0"	7'-0"	Wood	HM		Classroom set
16	Meds	3'-0"	7'-0"	Wood	HM		Storeroom set, EAC, closer
17	Patient Toilet (Infusion)	3'-0"	7'-0"	Wood	HM		Privacy set w\ indicator
18	Clean Utility (Infusion)	3'-0"	7'-0"	Wood	HM		Storeroom set, EAC, closer
19	Soiled Utility (Infusion)	3'-0"	7'-0"	Wood	HM		Storeroom set, closer
20	Patient Toilet (Infusion)	3'-0"	7'-0"	Wood	HM		Privacy set w\ indicator
21	Infusion Entry (Staff Corridor)	3'-0"	7'-0"	Wood	HM		Classroom set, EAC
22	Staff Toilet	3'-0"	7'-0"	Wood	HM		Privacy set w\ indicator
23	Exterior	3'-0"	7'-0"	Glass	Alum.	Insul. Temp.	Flushbolt always locked ,Closer, EAC
24	Pharmacy	3'-0"	7'-0"	Wood	HM		Classroom set, EAC
25	Med Storage	3'-0"	7'-0"	Wood	HM		Storeroom set, EAC, closer
26	Haz Med Storage	3'-0"	7'-0"	Wood	HM		Storeroom set, EAC, closer
27	Janitor	3'-0"	7'-0"	Wood	HM		Storeroom set
28	Entry Receiving	3'-0"	7'-0"	Wood	HM		Classroom set, EAC, closer
29	Tech Room	3'-0"	7'-0"	Wood	HM		Storeroom set, EAC, closer
30	Elect Room	3'-0"	7'-0"	Wood	HM		Storeroom set, closer
31	Exterior (Receiving)	4'-0"	7'-0"	HM\Insul	HM	Insul. Temp.	Flushbolt always locked ,Closer, EAC
32	Exterior (Staff Entry)	3'-0"	7'-0"	HM\Insul	HM	Insul. Temp.	Flushbolt always locked ,Closer, EAC
33	Staff Lockers\Breakroom	3'-0"	7'-0"	Wood	HM		Classroom, EAC, closer
34	Radiology Office	3'-0"	7'-0"	Wood	HM		Office set
35	Soiled Utility	3'-0"	7'-0"	Wood	HM		Storeroom set, closer
36	Clean Utility	3'-0"	7'-0"	Wood	HM		Storeroom set, EAC, closer
37	Meds	3'-0"	7'-0"	Wood	HM		Storeroom set, EAC, closer
38	Sterile Storage	3'-0"	7'-0"	Wood	HM		Storeroom set, EAC, closer
39A	Equipment Storage	3'-0"	7'-0"	Wood	HM		Storeroom set, EAC, closer
39B	Equipment Storage	3'-0"	7'-0"	Wood	HM		Storeroom set, EAC, closer
40	Staff Toilet	3'-0"	7'-0"	Wood	HM		Privacy set w\ indicator
41A	Entry Staff Work (Nuc Med)	3'-0"	7'-0"	Wood	HM		Classroom set, EAC, closer
41B	Entry Staff Work (Infusion)	3'-0"	7'-0"	Wood	HM		Classroom set, EAC, closer
42	Hot Lab	3'-0"	7'-0"	Wood	HM		Storeroom set, lead lined, EAC, closer
43	Rad Decay	3'-0"	7'-0"	Wood	HM		Storeroom set, lead lined, EAC, closer
44A	Control (PET\CT)	3'-0"	7'-0"	Wood	HM		Office set
44B	Control (PET\CT)	3'-0"	7'-0"	Wood	HM		Passage set, Lead Shld.
45A	Control (SPECT\CT)	3'-0"	7'-0"	Wood	HM		Office set
45B	Control (SPECT\CT)	3'-0"	7'-0"	Wood	HM		Passage set, Lead Shld.
46	Staff Entry (Nuc Med )	3'-0"	7'-0"	Wood	HM		Classroom set, EAC, closer
47A	SPECT\CT Scan	5'-0"	7'-0"	Wood	HM		Uneven Pair (3'-6"\1'-6") Classroom Set, lead shld, interlock
47B	Component (SPECT\CT)	3'-0"	7'-0"	Wood	HM		Storeroom lock set, closer
48	Stress Test	3'-6"	7'-0"	Wood	HM		Classroom set
49	IV Start	3'-6"	7'-0"	Wood	HM		Classroom set
50	Patient Toilet (Radiology)	3'-6"	7'-0"	Wood	HM		Privacy set w\ indicator
51	Hot Toilet	3'-6"	7'-0"	Wood	HM		Privacy set w\ indicator
52	Uptake	3'-6"	7'-0"	Wood	HM		Classroom set
53	Uptake	3'-6"	7'-0"	Wood	HM		Office set
54	Uptake	3'-6"	7'-0"	Wood	HM		Office set
55	PET\CT Scan	5'-0"	7'-0"	Wood	HM		Uneven Pair (3'-6"\1'-6") Classroom Set, lead shld, interlock
56	Component (PET\CT)	3'-0"	7'-0"	Wood	HM		Storeroom set

57	Entry (Nuc Med)	4'-0"	7'-0"	Wood	HM		Classroom set, EAC, closer
58	Entry (Staff Corridor)	3'-0"	7'-0"	Wood	HM		Classroom set, EAC, closer
59	Component (MRI)	3'-0"	7'-0"	Wood	HM		Storeroom set, closer
60A	Vestibule (MRI)	3'-0"	7'-0"	Wood	HM		Classroom set, EAC, closer
60B	Control (MRI)	3'-0"	7'-0"	Wood	HM	Temp.	Classroom set, EAC, Half glass light
60C	MRI Scan	4'-0"	7'-0"				By RF Sheilding Mfg
61	Component (CT)	3'-0"	7'-0"	Wood	HM		Storeroom set, closer
62	CT Scan	5'-0"	7'-0"	Wood	HM		Uneven Pair (3'-6"\1'-6") Classroom Set, lead shld, interlock
63	Control (CT)	3'-0"	7'-0"	Wood	HM	Temp.	Office set, half glass light
64	IV Start	3'-6"	7'-0"	Wood	HM		Office set
65	Patient Toilet	3'-0"	7'-0"	Wood	HM		Privacy set w\ indicator
66	Changing	3'-0"	7'-0"	Wood	HM		Privacy set w\ indicator
67	Changing	3'-0"	7'-0"	Wood	HM		Privacy set w\ indicator
68	Changing	3'-0"	7'-0"	Wood	HM		Privacy set w\ indicator
69	Consultant (Radiology)	3'-0"	7'-0"	Wood	HM		Classroom set
70	Consultant (Radiology)	3'-0"	7'-0"	Wood	HM		Classroom set
71	Entry Nuc Med (Waiting)	3'-0"	7'-0"	Wood	HM		Classroom set, EAC, closer
72	Exterior	3'-0"	7'-0"	Glass	Alum.	Insul. Temp.	Flushbolt always locked ,Closer, EAC

## NOTES

- 1 This schedule is to provide general requirements for the various types of doors, frames and hardware functions and is not intended to include all required hardware such as hinges, door stops, kickplates and other miscellaneous hardware.
- 2 All doors single swinging unless noted otherwise
- 3 EAC = Electrictronic Access Control