


Cash Pak Holes

Air escape holes are design to allow air removal during the heat exchange process while in the oven. The air holes shall be no larger than 6.35mm (1/4") diameter.

The air holes need to be placed on the top face of the cash-pak with a minimum of 8.5" ($\pm .5$ ") apart from each other.

The following figures depict the right location of the air holes.

Air holes vertical position

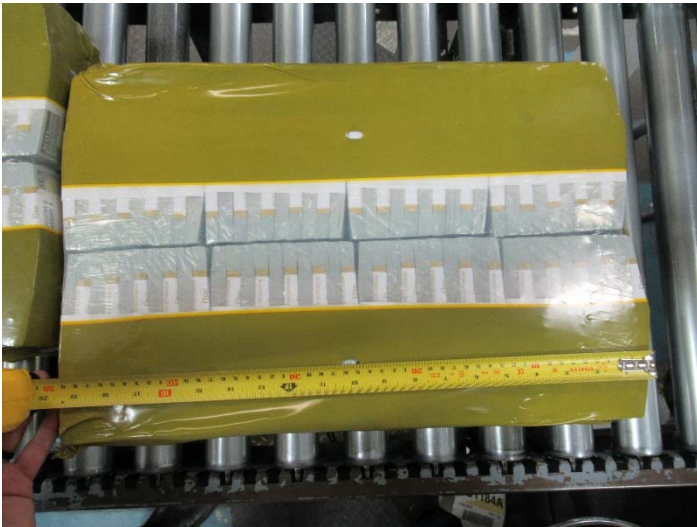

Air holes horizontal position

