

Statement of Work

PART 1 GENERAL

1.1 DESCRIPTION

- A. The work of this contract consists of the removal and disposal of three cottonwood trees and associated stumps from the Old Ennis Administrative Site.
- B. All work will be performed under a single contract.

1.2 LOCATION

- A. The Old Ennis Administrative Site is located at 209/211 East Ennis Street, Ennis, Montana.

1.3 CONTRACT START DATE

- A. The Notice to Proceed will be at a mutually agreeable date expected to be on or about August 15, 2023

1.4 CONTRACT TIME

- A. The work of this contract shall be completed within 21 Days

1.5 CONTRACTOR'S USE OF PREMISES

- A. Construction Camp: Establishment of a camp at the construction site will not be permitted.
- B. Conduct operations to ensure the least inconvenience to the building occupants.

1.6 SPECIAL CONSTRUCTION REQUIREMENTS

- A. Weekend and Holiday Work Restrictions: No on-site work shall be performed on weekends or federal holidays unless otherwise authorized by the Contracting Officer.

1.7 TEMPORARY SERVICES

- A. Electrical service, in the form of 120 volt, 15 amp receptacles, is available at no cost to the Contractor. Contractor is responsible for providing extension cords as needed.
- B. No telephone service is available on site for Contractor's use.
- C. Sanitary facilities are not available on the site.

1.8 TEMPORARY CONTROLS

A. SAFETY:

- 1. All work shall be performed in accordance with applicable OSHA regulations

2. Conduct operations to ensure the safety of Forest Service personnel, the public, and contractor's personnel.
3. Provide and install barricades as necessary to prevent site residents and the public from entering work area.

B. HOUSEKEEPING:

1. Keep project neat, orderly, and in a safe condition at all times. All debris shall be cleaned up at the end of each working day.

C. DISPOSAL:

1. Contractor shall be responsible for the dispose of removed trees, limbs, foliage, wood chips, and other debris in a legal manner off Forest Service property.

1.9 PRECONSTRUCTION CONFERENCE

- A. Before the start of project, the Contracting Officer's Rep. will arrange an on-site meeting with the Contractor.

PART 2 PRODUCTS NOT USED.

PART 3 EXECUTION

- 3.1 Forest Service property and improvements, private property and improvements, and existing overhead power lines shall be protected from damage. Contractor shall proceed with work in a manner that prevent damage to property. Contractor shall be responsible for any damage that occurs as a result of the work.
- 3.2 One of the trees to be removed currently has an overhead powerline attached to it. Coordinate with Northwestern Energy to remove the overhead powerline from the tree. Coordinate with Northwestern Energy as necessary for work around this and other overhead powerlines.
- 3.3 Remove tree stumps to a minimum depth of 6" below finish grade. Stumps shall be removed by a stump grinder or other means if approved by the Contracting Officer.


PART 4 MEASUREMENT AND PAYMENT

4.1 SUMMARY OF WORK

- A. Payment will be made at the contract lump sum price.

END OF SECTION



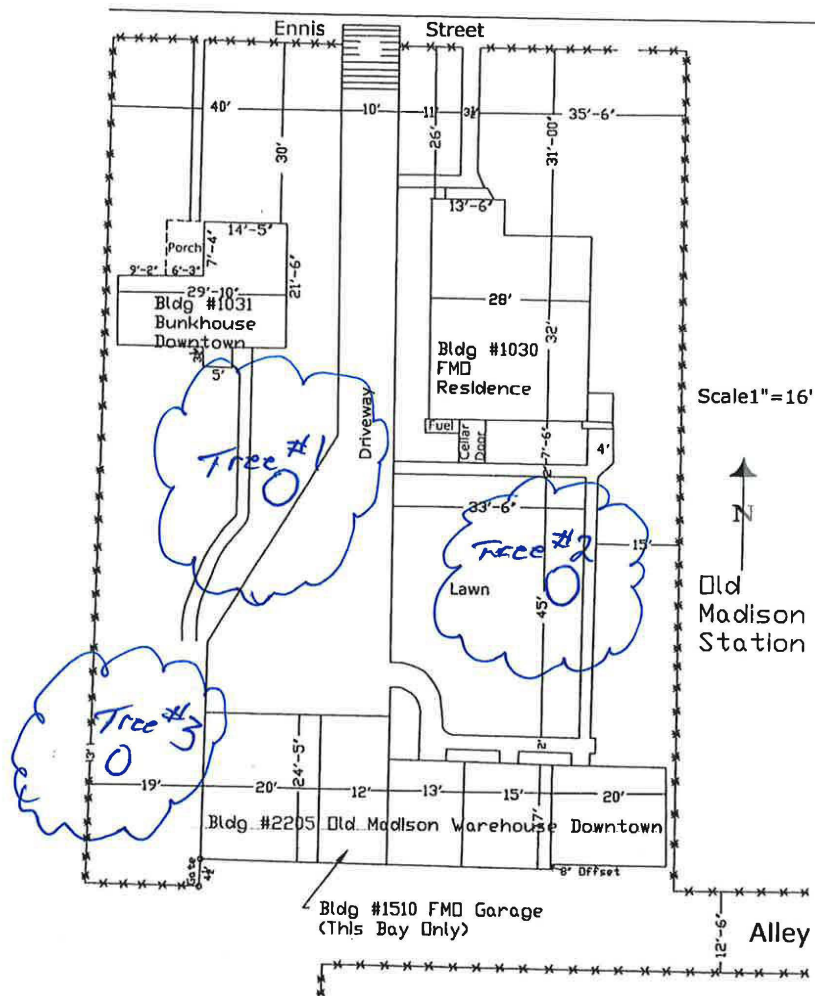



Tree #1



Tree #2



Tree #3