

W50S9C-23-B-0001
Expand Photovoltaic (PV) Array
QUESTIONS and ANSWERS


As of 8/16/23

1. Question: What type of stone is required for Option #6 Stone Drainage Cover?

Answer: This is detailed on drawing C-1. This drawing was accidentally omitted for the original drawing set. It was uploaded to SAM.gov on 15 Aug 23.

2. Question: Where is the laydown area?

Answer: The laydown area is depicted below. Contractor to install construction snow fencing from fire department to connect to the installation perimeter fence line. See picture below. Contractor is responsible for returning the laydown site to existing conditions upon conclusion of the project.

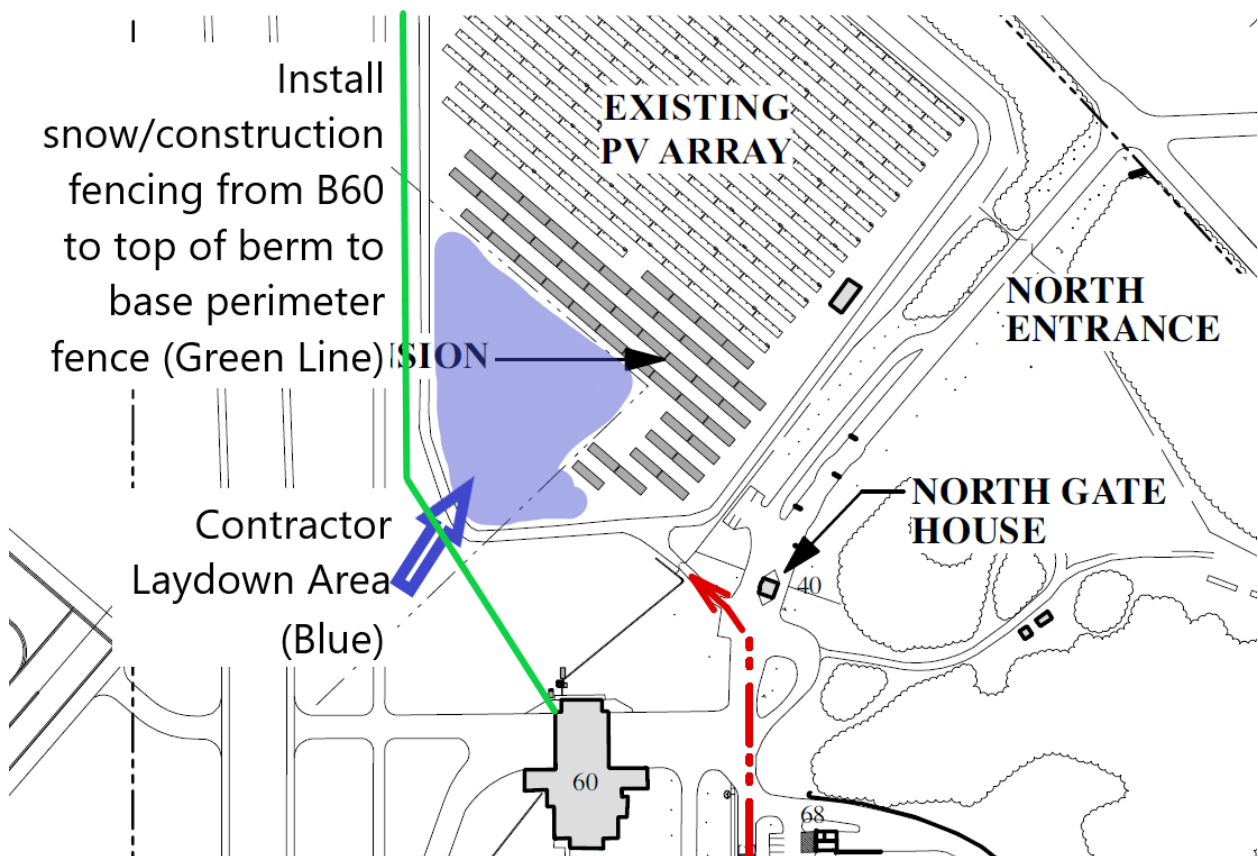

3. Question: Is there a preferred method of excavation?

Answer: Means and methods are not dictated, contractor shall take reasonable precautions to not damage utilities in utility rich areas or in areas where unprotected utilities are present.

4. Question: Are the trees staying near the areas where equipment is located near NCO Drive?

Answer: Yes.

5. Question: What is the water line depth on base?

Answer: Varies. Assume a minimum of 5-6ft.

6. Question: Is there water connection on site for providing water for fire suppression?

Answer: BESS system shall meet the requirements of UL9540A and NFPA 855. BESS battery section shall be provided with self-contained, internal fire suppression system with water supply located in a tank within the BESS enclosure. Remaining sections of BESS for inverter and other components outside the battery area to be chemical type system (ie. Novec). BESS shall have the required fire/smoke detection, gas detection and ventilation as required by NFPA 855.

REMINDER – ALL QUESTIONS MUST BE SUBMITTED FIVE WORKING DAYS PRIOR TO BID OPENING DATE (FRIDAY 18 AUG 23).